
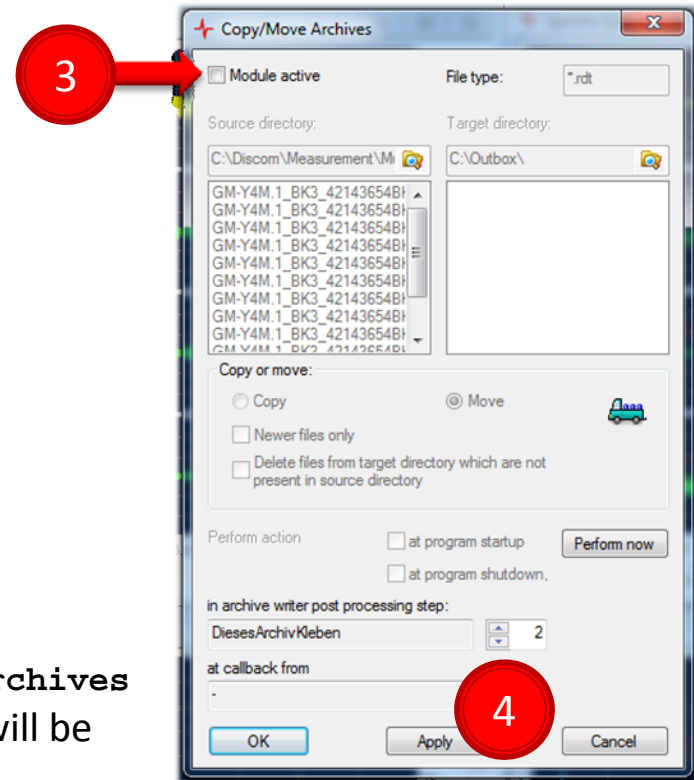


Suspend archive file transfer to server

Sometimes it is useful to temporarily suspend the automatic transfer of the measurement result archives to the server.

To do this, open the system configuration (1), navigate to “Copy/Move Archives” (2) and double-click to open the settings. In the settings, switch off the “Module active” check mark (3) and press [Apply] (4).

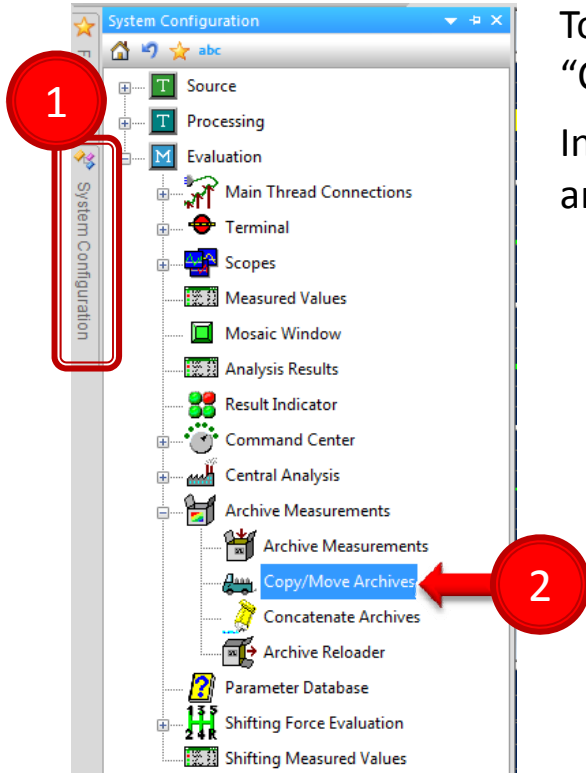

The archive files will now assemble in the folder
`C:\Discom\Measurement\Project name\TempArchives`
When you switch on “Module active”, all archives will be transferred to the server after the next test run.